

WHE407

WAY HUGE[®]
JUMBO FUZZ
SWOLLEN
PICKLE[®] **XXX**

THE MOST CORPULENT OF FUZZES!

is celebrating its 30th spin around the sun with a sweet new take on its crushing and humongous tone. The Way Huge Jumbo Fuzz Swollen Pickle XXX seethes and simmers with high-gain saturation and fat, hairy lows, but the ever-madder mad scientist Mister Huge has made some ethically questionable but sonically enlightened tweaks to enhance your control over the pedal's sound.

External Controls



- 1** CRUNCH switch toggles amount of compression
- 2** LO knob shapes the low-pass of the FILTER control
- 3** LOUDNESS knob adjusts overall volume
- 4** SUSTAIN knob adjusts fuzz intensity
- 5** FILTER knob adjusts tone from mellow to bright
- 6** HI knob shapes the high-pass of the FILTER control

POWER

The Jumbo Fuzz Swollen Pickle™ XXX is powered by a single 9-volt battery, a 9-volt AC adapter such as the Dunlop ECB003, or an MXR® Brick™ series power supply. The power input is a 5.5mm x 2.1mm jack with the positive voltage on the outer sleeve. Using an external power supply will disconnect the battery. Disconnect the input jack to preserve battery life when not in use.


Internal Controls

SW3 adjusts the filter sweep of the HI


SW4 adjusts the filter sweep of the LO

Internal DIP switch configurations allow you to customize the tone sweep, from flat to ultra scooped or super bumped.

DEFAULT

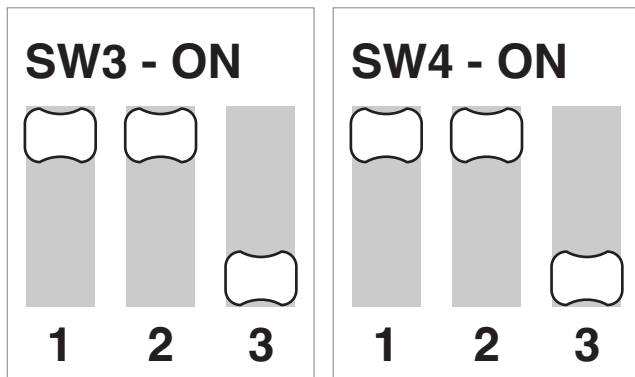


CLASSIC SWOLLEN PICKLE® FUZZ

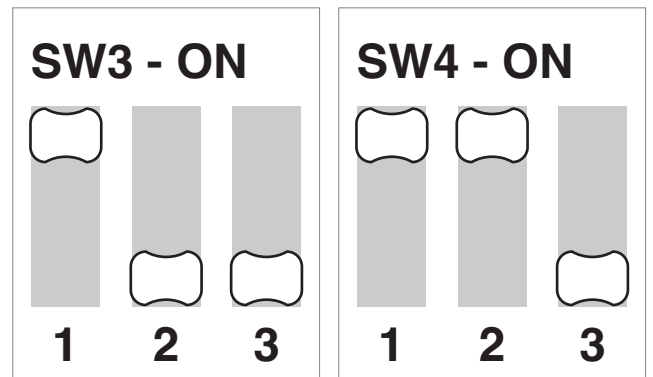

RUSSIAN PICKLE™ FUZZ



CLASSIC V2

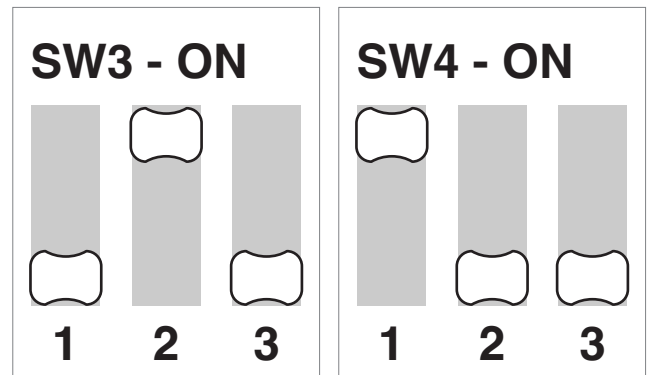

Specifications

Input Impedance	40 k Ω
Output Impedance	9 k Ω
Bypass	True Bypass
Current Draw	6 mA
Power Supply	9 VDC