



LIVE TO PLAY LIVE®

CUSTOM AUDIO ELECTRONICS



MC401 BOOST/ LINE DRIVER



JIMDUNLOP.COM

92503004776revD

# MC401 BOOST/LINE DRIVER

## DESCRIPTION

- Boost function with knob adjustment from 0 to +20dB of clean uncolored boost
- True bypass

## CONTROLS

- 1 BOOST knob controls overall boost (inactive in bypass mode)
- 2 AC adapter input
- 3 Footswitch toggles effect on/bypass (ice blue LED indicates on)

## POWER

The MXR/CAE Boost/Line Driver is powered by one 9 volt battery (remove bottom plate to install), a 9 volt AC Adapter such as the Dunlop ECB003/ECB003EU or a powersupply such as the DC Brick™.


## DIRECTIONS

- Run a cable from your guitar to the Boost/Line Driver's Input jack and run another cable from the Boost/Line Driver's Output jack to your amplifier.
- Start with the Boost knob at 0dB. Rotate the knob clockwise to increase boost level, up to +20dB.

## SPECIFICATIONS

Input Impedance	1 k $\Omega$
Output Impedance	150 $\Omega$
Nominal Input	-22 dBV
Output Level	-22 dBV
Boost Gain Range	20 dB
Noise Floor*	>95 dB
Bypass	True Hardwire
Current Draw	1.5 mA
Power Supply	9 volts DC

\*A-weighted,  $V_{ref}=1V_{rms}$

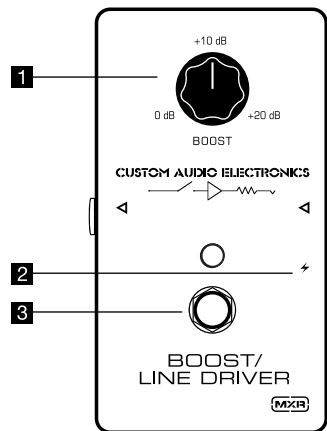

DUNLOP MANUFACTURING, INC.  
P.O. BOX 846 BENICIA, CA 94510 U.S.A.  
TEL: 1-707-745-2722 FAX: 1-707-745-2658